
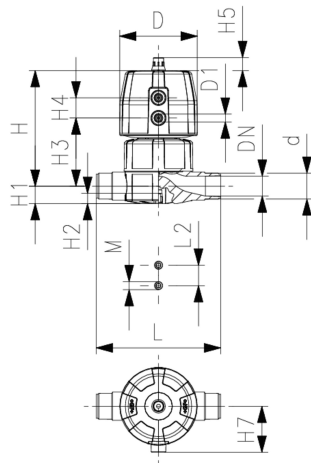




**SYGEF Standard Diaphragm valve DIASTAR Ten
DA (Double acting)
With socket fusion spigots metric**

Model:

- Material: PVDF
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- Overall length EN 558

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

Working Pressure: **one side**

d (mm)	DN (mm)	kv-value ($\Delta p=1$ bar) (L/min)	PTFE/ EPDM* Code	SP	Weight (kg)
20	15	125	185 655 032	1	0.604
25	20	271	185 655 033	1	0.989
32	25	481	185 655 034	1	1.201
40	32	759	185 655 035	1	1.848
50	40	1263	185 655 036	1	3.031
63	50	1728	185 655 037	1	3.878

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M	Lift = Hx (mm)	closest inch (inch)
20	68	1/8	101	14	12	60	24	16	43	124	25	M6	7	1/2
25	96	1/8	132	18	12	73	25	16	57	144	25	M6	10	3/4
32	96	1/8	143	22	12	84	25	16	57	154	25	M6	13	1
40	120	1/8	173	26	15	99	26	26	69	174	45	M8	15	1 1/4
50	150	1/4	214	32	15	119	36	26	88	194	45	M8	19	1 1/2
63	150	1/4	226	39	15	132	36	26	88	224	45	M8	23	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>