




SYGEF Standard Ventilating valve type 595 With fusion sockets metric

Model:

- Material: PVDF
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Spring HALAR coated
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Compact installation length

d (mm)	DN (mm)	PN (bar)	FKM Code	D (mm)	L (mm)	t (mm)	closest inch (inch)
16	10	16	175 595 011	50	126	14	$\frac{3}{8}$
20	15	16	175 595 012	50	127	15	$\frac{1}{2}$
25	20	16	175 595 013	58	142	16	$\frac{3}{4}$
32	25	16	175 595 014	68	153	18	1
40	32	16	175 595 015	84	171	19	1 $\frac{1}{4}$
50	40	16	175 595 016	97	190	21	1 $\frac{1}{2}$
63	50	16	175 595 017	124	219	26	2
75	65	16	175 595 018	166	256	33	2 $\frac{1}{2}$
90	80	16	175 595 019	200	275	37	3
110	100	16	175 595 020	238	318	43	4

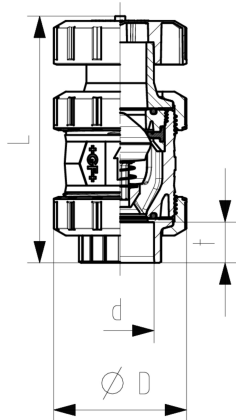

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>