


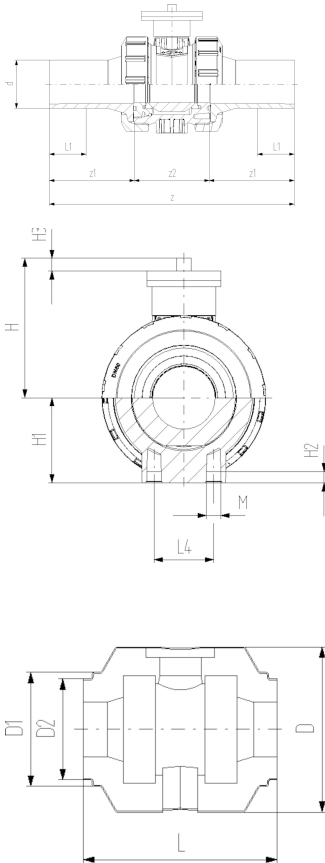

COOL-FIT 2.0 Ball valve type 546 Pro bare shaft

Model:

- Material: PVC-U with spigot PE100 SDR11, metric
- Ball seat PTFE
- Integrated stainless steel mounting inserts
- Interface according to DIN EN ISO 5211
- Including insulation half shells

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	SDR	EPDM Code	Weight (kg)
32	25	16	700	11	138 546 408	0.560
40	32	16	1000	11	138 546 409	0.900
50	40	16	1600	11	138 546 410	1.190
63	50	16	3100	11	138 546 411	2.110
75	65	16	5000	11	138 546 412	5.550
90	80	16	7000	11	138 546 413	8.150

d (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	Hole pattern	L (mm)	L1 (mm)	M	z (mm)	z1 (mm)	z2 (mm)
32	135	97	82	72	36	12	11	F05/F03	152	36	M6	223	76	71
40	157	117	97	84	44	15	11	F05/F03	170	40	M8	249	82	85
50	169	117	97	90	51	15	11	F05/F03	184	44	M8	271	91	89
63	204	132	117	105	64	15	10	F05/F03	227	48	M8	321	110	101
75	235	147	132	177	85	15	21	F07	276	55	M8	386	125	136
90	235	168	147	189	105	15	21	F07	297	62	M8	421	140	141

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>