




PROGEF Standard Ventilating valve type 595
With socket fusion spigots metric

Model:

- Material: PP-H
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Spring HALAR coated
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Compact installation length

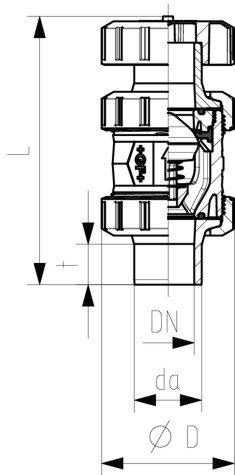

d (mm)	SDR	DN (mm)	PN (bar)	EPDM Code	FKM Code	D (mm)	L (mm)	t (mm)	closest inch (inch)
16	11	10	10	167 595 041	167 595 051	50	135	13	3/8
20	11	15	10	167 595 042	167 595 052	50	140	14	1/2
25	11	20	10	167 595 043	167 595 053	58	157	16	3/4
32	11	25	10	167 595 044	167 595 054	68	168	18	1
40	11	32	10	167 595 045	167 595 055	84	189	20	1 1/4
50	11	40	10	167 595 046	167 595 056	97	211	23	1 1/2
63	11	50	10	167 595 047	167 595 057	124	245	27	2
75	11	65	10	167 595 048	167 595 058	166	280	48	2 1/2
90	11	80	10	167 595 049	167 595 059	200	296	49	3
110	11	100	10	167 595 050	167 595 060	238	336	54	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>