


**PROGEF Standard Diaphragm valve DIASTAR Six
FC (Fail safe to close)
With butt fusion spigots SDR11 metric**

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals

Option:

- Individual configuration of the valve

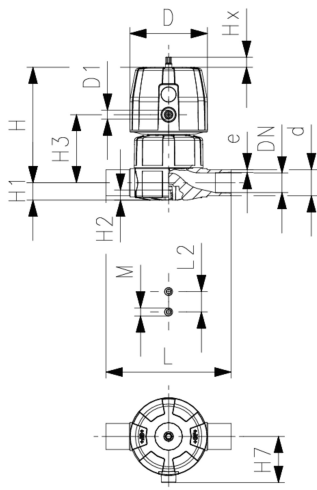

d	DN	Size	PN	kv-value	EPDM	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code	(kg)
				(l/min)		
25	20	¾	6	271	167 615 113	0.900
32	25	1	6	481	167 615 114	1.062
40	32	1 ¼	6	759	167 615 115	1.743
50	40	1 ½	6	960	167 615 116	2.202
63	50	2	6	1181	167 615 117	2.978

d	D	D1_G	H	H1	H2	H3	H7	L	L2	M	e	Lift = Hx	closest inch
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)	(inch)
25	96	¾	132	18	12	73	57	144	25	M6	2.3	10	¾
32	96	¾	143	22	12	84	57	154	25	M6	2.9	13	1
40	120	¾	173	26	15	99	69	174	45	M8	3.7	14	1 ¼
50	120	¾	193	32	15	119	69	194	45	M8	4.6	16	1 ½
63	120	¾	205	39	15	132	69	224	45	M8	5.8	16	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>