


PROGEF Standard Check valve type 561
Without spring
With butt fusion spigots IR-Plus SDR11 metric

Model:

- Material: PP-H
- Ball is sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

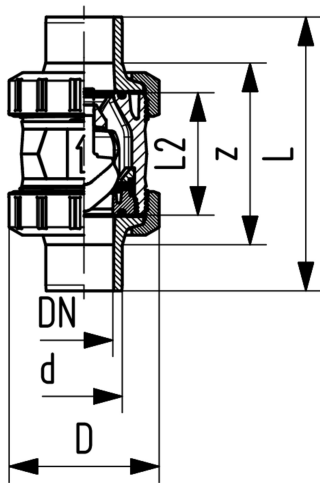

d	DN	Size	SDR	PN	kv-value	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)		(bar)	($\Delta p=1$ bar)	Code	(kg)	Code	(kg)
					(l/min)				
20	15	½	11	10	180	167 561 082	0.080	167 561 092	0.080
25	20	¾	11	10	380	167 561 083	0.170	167 561 093	0.180
32	25	1	11	10	460	167 561 084	0.203	167 561 094	0.190
40	32	1 ¼	11	10	850	167 561 085	0.340	167 561 095	0.340
50	40	1 ½	11	10	1080	167 561 086	0.523	167 561 096	0.490
63	50	2	11	10	1670	167 561 087	0.989	167 561 097	1.027
75	65	2 ½	11	10	2950	167 561 088	2.350	167 561 098	2.360
90	80	3	11	10	3600	167 561 089	3.660	167 561 099	3.680
110	100	4	11	10	4150	167 561 090	5.810	167 561 100	5.830

d	D	L	L2	e	closest
(mm)	(mm)	(mm)	(mm)	(mm)	inch
					(inch)
20	50	130	56	1.9	½
25	58	143	65	2.3	¾
32	68	150	71	2.9	1
40	84	171	85	3.7	1 ¼
50	97	191	89	4.6	1 ½
63	124	220	101	5.8	2
75	166	266	136	6.8	2 ½
90	200	264	141	8.2	3
110	238	301	164	10.0	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>