Data sheet

valid from: 3/28/26

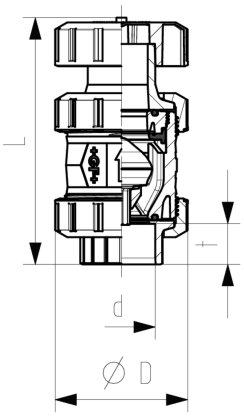

SYGEF Standard Ventilating and bleed valve type 591
With fusion sockets metric

Model:

- Material: PVDF
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Special floater made of PVDF
- Designed for easy installation and removal
- Compact installation length

d (mm)	DN (mm)	PN (bar)	FKM Code	D (mm)	L (mm)	t (mm)	closest inch (inch)
16	10	16	**175 591 011**	50	126	14	⅜
20	15	16	**175 591 012**	50	127	15	½
25	20	16	**175 591 013**	58	142	16	¾
32	25	16	**175 591 014**	68	153	18	1
40	32	16	**175 591 015**	84	171	19	1 ¼
50	40	16	**175 591 016**	97	190	21	1 ½
63	50	16	**175 591 017**	124	219	26	2
75	65	16	**175 591 018**	166	256	33	2 ½
90	80	16	**175 591 019**	200	275	37	3
110	100	16	**175 591 020**	238	318	43	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com